


REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED



NOTES

1. MATERIAL : CYLINDER - HEAVY GAUGE STEEL , BLACK POWDERCOAT PAINT
ROD - HARDENED STEEL BLACK NITRIDE
2. FORCE: 1000LBS / 4450N
3. DIMENSIONS ASSUMING END CONNECTORS ARE FULLY SCREWED INTO PLACE
4. DRAWING LENGTHS (NOT DIMENSIONED) OF CYLINDER AND ROD BODIES ARE NOT TO SCALI
5. OPERARTING TEMPERATURE : - 3 0 C TO + 8 0 C
6. Label to include part number , date code , and warning message Label not to be remove
7. Gas Spring not to be modified , or changed from manufactured , original , product
8. Gas Spring to is suggested to be mounted shaft down (rod down) for maximum performance
9. Connectors to be lined up per drawing . 5 degree devison permitted
- 10 . Gas Springs will be individually packed in sealed clear plastic bags , to avoid damage , dust , or other foreign material - obiects
- 11 . Gas Spring to be assembled per the drawing with end fittings assembled / fastened
- 12 . Gas Springs are not to be opened
- 13 . Inside of each end fitting to be greased

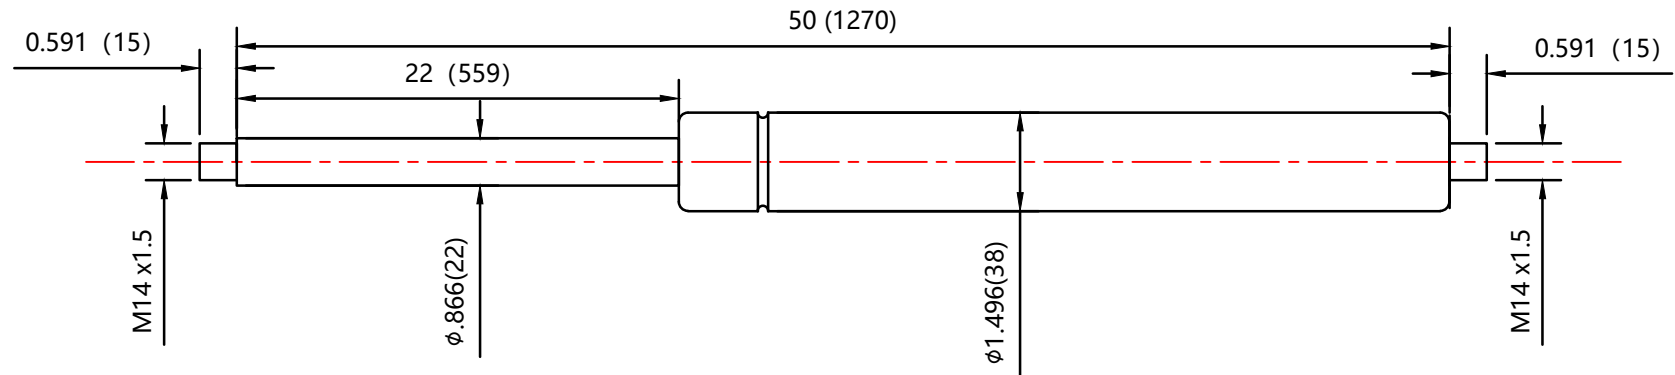

<small>THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF NUOMENG</small> <small>THIS DOCUMENT CONTAINS CONFIDENTIAL PROPRIETARY INFORMATION. THE REPRODUCTION, DISTRIBUTION, UTILISATION OR THE COMMUNICATION OF THIS DOCUMENT OR ANY PART THEREOF, WITHOUT EXPRESS AUTHORISATION IS STRICTLY FORBIDDEN.</small>	DRAWN	NAME	DATE
	CHECKED	Faith	3/26/20
<small>REMOVE ALL BURRS & BREAK ALL SHARP EDGES</small>	DWG NO		REV
	NSG5000Y1000		0
<small>ALL DIMENSIONS ARE IN inch UNLESS OTHERWISE SPECIFIED</small>	TITLE		
	Gas Spring		
<small>THIRD ANGLE PROJECTION</small>	TOLERANCES		SCALE
	X.X	±0.060	N.T.S.
<small>SHEET 1 OF 1</small>	X.XX	±0.030	<small>SIZE B</small>
	X.XXX	±0.015	
ANGLES	±FE	HOLES	
		±0.005	